
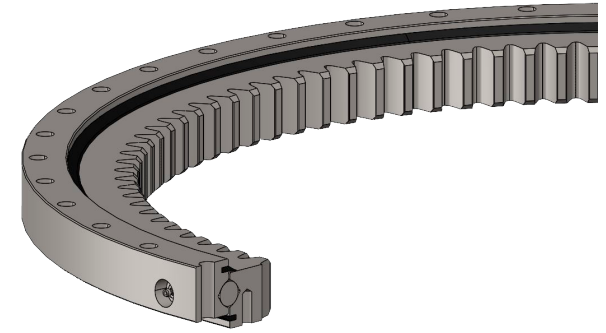
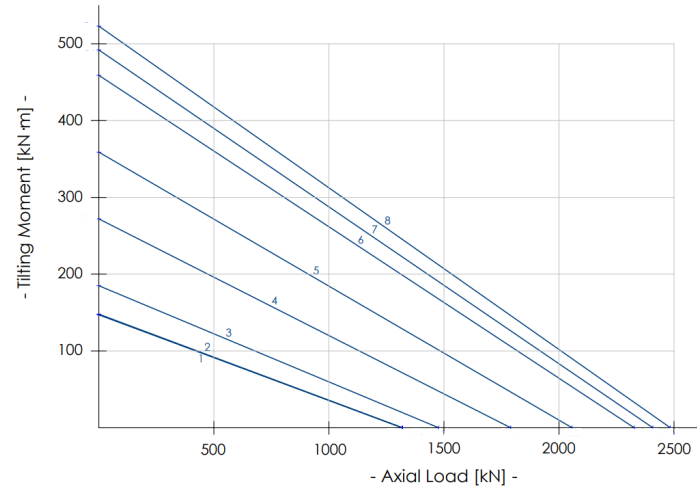


I 25.00.D




Special version, ball Ø25mm, internal geared, special holes

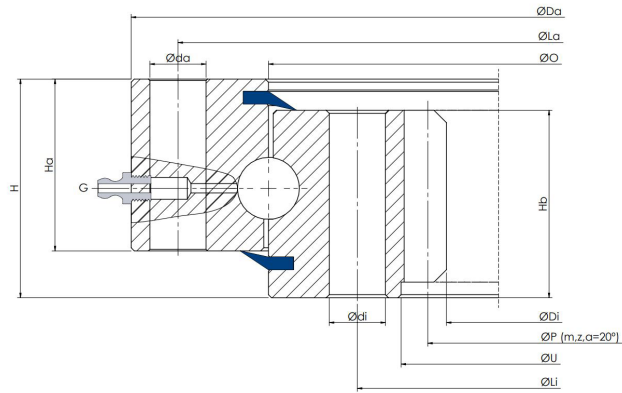

Slewing Ring Type	Dimensions							Fixing holes					Gear			Tooth Force		Mass	
	Da mm	O mm	U mm	Di mm	Ha mm	Hb mm	H mm	La mm	na n°	da mm	Li mm	ni n°	di mm	P mm	m	z n°	Fz nor. kN	Fz max. kN	Weight kg
1 I.562.25.15.D.1	560	489	418	385	43	50	60	538	30	14	440	30	14	396	6	66	25.5	36.5	41
2 I.570.25.00.D.1	570	488	410	378	55	55	70	540	18	18	436	18	18	390	6	65	25.7	35.9	54
3 I.635.25.00.D.3.V	635	547	467	439.5	50	50	60	605	24	15	490	16	M16	444	6	74	30.9	46	57
4 I.750.25.00.D.1	750	663	575	546	55	55	70	720	20	18	605	20	18	558	6	93	26.4	37	76
5 I.850.25.00.D.1	850	762	677	648	55	55	70	820	24	18	705	24	18	660	6	110	24.9	36	91
6 I.950.25.00.D.1	950	862	775	736	55	55	70	920	30	18	805	30	18	752	8	94	33.3	46.6	108
7 I.980.25.00.D.3	975	892	892	784	72	66	84	944	36	18	850	36	M16	800	8	100	43	62	135
8 I.1015.25.15.D.1	1015	920	824	784	67	66	82	980	40	18	860	40	18	800	8	100	43	62	143

I 32.00.D

Special version, ball Ø32mm, internal geared, special holes

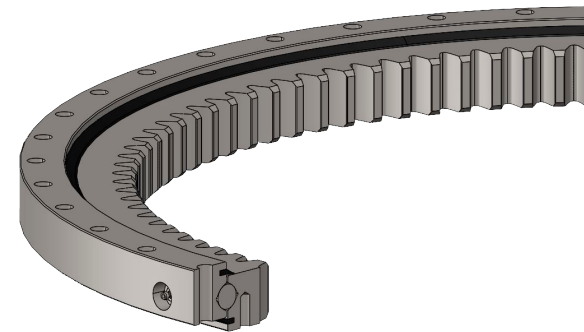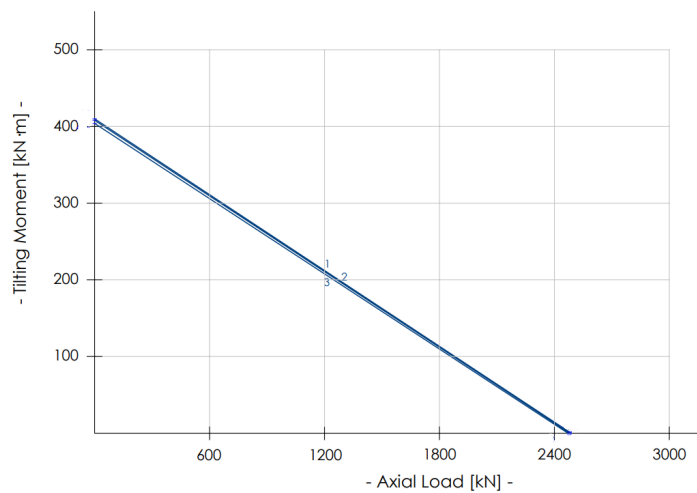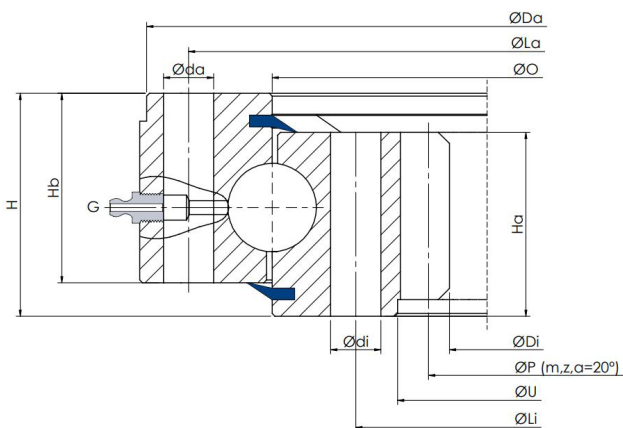

Slewing Ring Type	Dimensions							Fixing holes					Gear			Tooth Force		Mass		
	Da mm	O mm	U mm	Di mm	Ha mm	Hb mm	H mm	La mm	na n°	da mm	Li mm	ni n°	di mm	P mm	m	z n°	Fz nor. kN	Fz max. kN	Weight kg	
1	I.810.32.00.D.1	805	718	630	601	60	68	80	780	20	18	660	20	18	612	6	102	28.2	40.3	110
2	I.815.32.10.D.1	810	720	630	593	60	68	80	780	30	18	660	30	18	608	8	76	37.9	53.1	110
3	I.816.32.00.D.1	815	715	605	568.9	67	75	90	785	18	17	640	18	17	574	7	82	37	51.8	143