
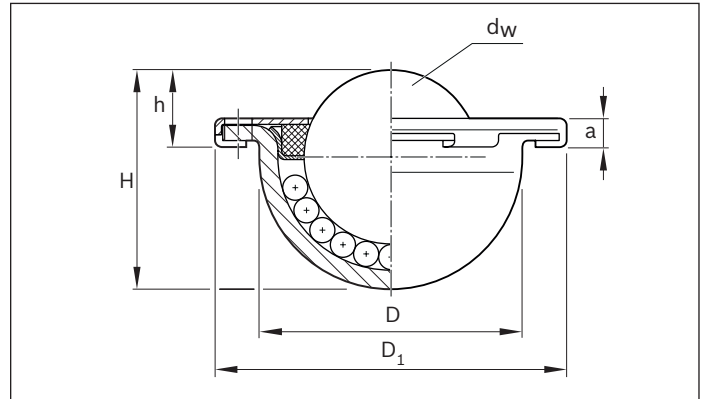


Ball Transfer Unit without housing R0534 ...



Version Without housing. Low space requirement. Simple mounting. Mounting via holes in the collar.	Size	Part number	Load capacities (N)		Dimensions (mm)						Weight (kg)
											
			dyn. C	stat. C ₀	d _w	D ^{-0.2}	D ₁	h ^{±0.2}	H	a	m
R0534 1.. KUO - B22 - MFG Surface galvanized. Balls made from antifriction bearing steel 1.3505. With felt seal.	22	R0534 122 10	1 200	1 200	22.225	33	45	9.8	27.7	3.8	0.1
R0534 2.. KUO - C22 - MFG All parts galvanized. Balls made from corrosion-resistant Steel 1.3541 / 1.4034. With felt seal.	22	R0534 222 10	900	900	22.225	33	45	9.8	27.7	3.8	0.1
		R0534 223 10 ¹⁾									



¹⁾ Ball Transfer Unit with bottom hole

Explanation of short product name

(Example: **R0534 223 10 KUO-C22-BL-MFG**)

KUO	C	22	BL	MFG
Ball Transfer Unit without housing	All parts galvanized, balls made from corrosion-resistant steel	Size	Bottom hole	With felt seal, lubricated

Installation suggestion

Size	Installation dimensions (mm)		
			
	S	T_k	W
22	3.5	39	3 x 120°