


Browning®

Mounted Ball Bearings



Duty: Intermediate
Rolling Elements: Ball
Housing: Cast Iron Four Bolt Flange
Self Alignment: +/- 1.5 Degrees
Lock: Setscrew
Seal: Contact and Flinger
Temperature: -20° to 200°F

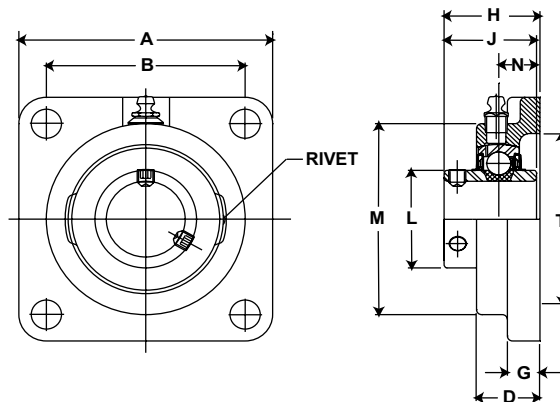

VF4S 100 Series Intermediate Duty Four Bolt Flanges - Setscrew Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B*	D	G	H	J	L	M	N	T Cored		
1/2	VF4S-108	VS-108	2108	3	2 1/8	23/32	3/8	1 5/64	15/16	31/32	2 1/8	5/16	1 3/4	3/8	1.0
5/8	VF4S-110	VS-110	9377	76.2	54.0	18.3	9.5	27.4	23.8	24.6	54.0	7.9	44.5		.45
3/4	VF4S-112	VS-112	2611	3 3/8	2 1/2	57/64	7/16	1 9/32	1 1/16	1 3/16	2 1/2	11/32	2	3/8	1.3
			11614	85.7	63.5	22.6	11.1	32.5	27.0	30.2	63.5	8.7	50.8		.59
7/8	VF4S-114	VS-114	2801 12459	3 3/4	2 3/4	61/64	1/2	1 25/64	1 7/64	1 3/8	2 3/4	11/32	2 1/2	7/16	1.7
15/16	VF4S-115	VS-115													
1	VF4S-116	VS-116													
1 1/8	VF4S-118	VS-118	4381 19487	4 1/4	3 1/4	1 5/64	17/32	1 15/32	1 5/32	1 19/32	3 1/8	3/8	2 7/8	7/16	2.4
1 3/16	VF4S-119	VS-119													
1 1/4	VF4S-120S	VS-120S													
1 1/4	VF4S-120	VS-120	5782 25718	4 5/8	3 5/8	1 5/32	19/32	1 39/64	1 9/32	1 55/64	3 5/8	27/64	3 1/4	1/2	3.4
1 3/8	VF4S-122	VS-122													
1 7/16	VF4S-123	VS-123													
1 1/2	VF4S-124	VS-124	7340	5 1/8	4	1 19/64	5/8	1 49/64	1 27/64	2 1/16	4 1/8	31/64	3 1/2	1/2	4.4
			32648	130.2	101.6	32.9	15.9	44.8	36.1	52.4	104.8	12.3	88.9		2.00
1 11/16	VF4S-127	VS-127	7901	5 3/8	4 1/8	1 21/64	5/8	1 13/16	1 7/16	2 19/64	4 3/8	31/64	3 7/8	9/16	4.7
1 3/4	VF4S-128	VS-128	35144	136.5	104.8	33.7	15.9	46.0	36.5	58.3	111.1	12.3	98.4		2.13
1 15/16	VF4S-131	VS-131	7889	5 5/8	4 3/8	1 23/64	5/8	1 59/64	1 35/64	2 15/32	4 9/16	1/2	4	9/16	5.4
2	VF4S-132S	VS-132S	35090	142.9	111.1	34.5	15.9	48.8	39.3	62.7	115.9	12.7	101.6		2.45
2	VF4S-132	VS-132	9752	6 3/8	5 1/8	1 33/64	13/16	2 7/64	1 21/32	2 23/32	5 1/4	35/64	4 1/4	5/8	7.7
2 3/16	VF4S-135	VS-135	43377	161.9	130.2	38.5	20.6	53.6	42.1	69.1	133.4	13.9	108.0		3.49

* To obtain bolt circle multiply B x 1.414".

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.



For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.

Mounted Ball Bearings *Browning*

Mtd. Ball Bearings



Duty: Intermediate
Rolling Elements: Ball
Housing: Cast Iron Four Bolt Flange
Self Alignment: +/- 1.5 Degrees
Lock: Eccentric
Seal: Contact
Temperature: -20° to 200°F



VF4E 100 Series Intermediate Duty Four Bolt Flanges - Eccentric Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B*	D	G	H	J	L	M	N	T Cored		
1/2	VF4E-108	VE-108	2108	3	2 1/8	23/32	3/8	1 21/64	1 3/16	1 3/16	2 1/8	5/16	1 3/4	3/8	1.1
5/8	VF4E-110	VE-110	9377	76.2	54.0	18.3	9.5	33.7	30.2	30.2	54.0	7.9	44.5		.50
3/4	VF4E-112	VE-112	2611 11614	3 3/8	2 1/2	57/64	7/16	1 31/64	1 17/64	1 5/16	2 1/2	11/32	2	3/8	1.4
				85.7	63.5	22.6	11.1	37.7	32.1	33.3	63.5	8.7	50.8		.64
7/8	VF4E-114	VE-114	2801 12459	3 3/4	2 3/4	61/64	1/2	1 35/64	1 17/64	1 1/2	2 3/4	11/32	2 1/2	7/16	1.8
15/16	VF4E-115	VE-115		95.3	69.9	24.2	12.7	39.3	32.1	38.1	69.9	8.7	63.5		
1	VF4E-116	VE-116													
1 1/8	VF4E-118	VE-118	4381 19487	4 1/4	3 1/4	1 5/64	17/32	1 47/64	1 27/64	1 3/4	3 1/8	3/8	2 7/8	7/16	2.6
1 3/16	VF4E-119	VE-119		108.0	82.6	27.4	13.5	44.1	36.1	44.5	79.4	9.5	73.0		
1 1/4	VF4E-120S	VE-120S													
1 1/4	VF4E-120	VE-120	5782 25718	4 5/8	3 5/8	1 5/32	19/32	1 29/32	1 37/64	2 3/16	3 5/8	27/64	3 1/4	1/2	3.6
1 3/8	VF4E-122	VE-122		117.5	92.1	29.4	15.1	48.4	40.1	55.6	92.1	10.7	82.6		
1 7/16	VF4E-123	VE-123													
1 1/2	VF4E-124	VE-124	7340 32648	5 1/8	4	1 19/64	5/8	2 7/64	1 49/64	2 3/8	4 1/8	31/64	3 1/2	1/2	4.7
				130.2	101.6	32.9	15.9	53.6	44.8	60.3	104.8	12.3	88.9		2.13
1 11/16	VF4E-127	VE-127	7901 35144	5 3/8	4 1/8	1 21/64	5/8	2 9/64	1 49/64	2 1/2	4 3/8	31/64	3 7/8	9/16	5.0
1 3/4	VF4E-128	VE-128		136.5	104.8	33.7	15.9	54.4	44.8	63.5	111.1	12.3	98.4		
1 15/16	VF4E-131	VE-131	7889 35090	5 5/8	4 3/8	1 23/64	5/8	2 5/32	1 25/32	2 3/4	4 9/16	1/2	4	9/16	5.6
2	VF4E-132S	VE-132S		142.9	111.1	34.5	15.9	54.8	45.2	69.9	115.9	12.7	101.6		
2	VF4E-132	VE-132	9752 43377	6 3/8	5 1/8	1 33/64	13/16	2 7/16	1 63/64	3	5 1/4	35/64	4 1/4	5/8	7.7
2 3/16	VF4E-135	VE-135		161.9	130.2	38.5	20.6	61.9	50.4	76.2	133.4	13.9	108.0		

* To obtain bolt circle multiply B x 1.414".