


Mounted Ball Bearings *Browning*

Mtd. Ball Bearings



Duty: Light
Rolling Elements: Ball
Housing: Stamped Steel Three Bolt Flange
Self Alignment: +/- 1.5 Degrees
Lock: Setscrew
Seal: Contact
Temperature: -20° to 200°F
Relube: No

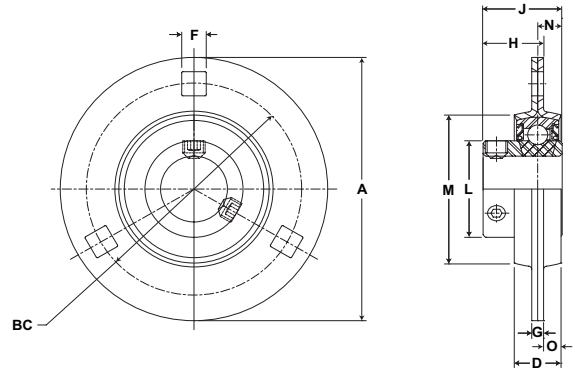

SSF3S 100 Series Light Duty Stamped Steel Three Bolt Flanges - Setscrew Locking

Bore Diameter inch	Steady Radial Load lb/N	Part No.	Bearing Insert No.	Dimensions inch / mm											Bolt Size	Unit Wt. lb/kg
				A	BC	D	F Square	G	H	J	L	M	N	O		
3/4	700 3114	SSF3S-112	LS-112	3 9/16 90.5	2 13/16 71.4	43/64 17.1	11/37 8.7	11/64 4.4	13/16 20.6	1 1/16 27.0	1 3/16 30.2	2 1/64 51.2	11/32 8.7	1/4 6.4	5/16	1.0 .45
7/8	800 3558	SSF3S-114	LS-114	3 3/4 95.3	3 76.2	43/64 17.1	11/32 8.7	11/64 4.4	55/64 21.8	1 7/64 28.2	1 3/8 34.9	2 7/32 56.4	11/32 8.7	1/4 6.4	5/16	1.3 .59
15/16		SSF3S-115	LS-115													
1		SSF3S-116	LS-116													
1 1/8	1100 4893	SSF3S-118	LS-118	4 7/16 112.7	3 9/16 90.5	17/23 18.8	13/32 10.3	13/64 5.1	57/64 22.6	1 5/32 29.4	1 19/32 40.5	2 21/32 67.5	3/8 9.5	17/64 6.7	3/8	1.5 .68
1 3/16		SSF3S-119	LS-119													
1 1/4		SSF3S-120S	LS-120S													
1 1/4	1400 6227	SSF3S-120	LS-120	4 13/16 122.2	3 15/16 100.0	53/64 21.0	13/32 10.3	13/64 5.1	31/32 24.6	1 9/32 32.5	1 55/64 47.2	3 1/16 77.8	27/64 10.7	5/16 7.9	3/8	1.8 .82
1 3/8		SSF3S-122	LS-122													
1 7/16		SSF3S-123	LS-123													

Browning®

Mounted Ball Bearings



Duty: Light

Rolling Elements: Ball

Housing: Stamped Steel Three Bolt Triangular Flange



Self Alignment: +/- 1.5 Degrees

Lock: Setscrew

Seal: Contact

Temperature: -20° to 200°F

Relube: No



SSF3TS 100 Series Light Duty Stamped Steel Three Bolt Flanges - Setscrew Locking

Bore Diameter inch	Max Radial Load lb/N	Part No.	Bearing Insert No.	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	BC	D	F Square	G	J	H	K	L	M		
3/4	700 3114	SSF3TS-112	LS-112	3 76.2	2 13/16 71.4	21/32 16.7	11/32 8.7	11/64 4.2	1 1/16 27.0	23/32 18.3	1 5/16 33.3	1 3/16 30.2	2 1/64 51.2	5/16	1.0 .45
7/8 15/16 1	800 3558	SSF3TS-114 SSF3TS-115 SSF3TS-116	LS-114 LS-115 LS-116	3 1/8 79.4	3 76.2	21/32 16.7	11/32 8.7	11/64 4.2	1 7/64 28.2	49/64 19.4	1 3/8 34.9	1 3/8 34.9	2 7/32 56.4	5/16	1.1 .50
1 1/8 1 3/16 1 1/4	1100 4893	SSF3TS-118 SSF3TS-119 SSF3TS-120S	LS-118 LS-119 LS-120S	3 11/16 93.7	3 9/16 90.5	3/4 19.1	11/32 8.7	13/64 5.2	1 5/32 29.4	25/32 19.8	1 1/2 38.1	1 19/32 40.5	2 21/32 67.5	3/8	1.3 .59

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.